
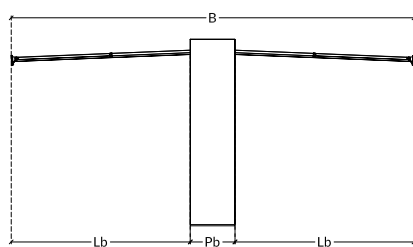
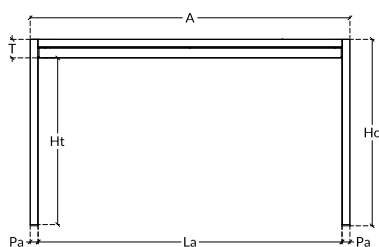



GATESHADE

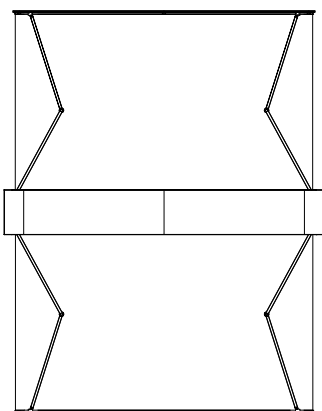

OPZIONI COLORE COLOUR OPTION

Struttura Structure:

Colore standard *standard colour*

bianco opaco *matt white*

antracite *anthracite*

titanio *titanium*

corten *corten*

nero opaco *matt black*

taupe *taupe*

Telo di copertura *Awning colors:*

Tessuto standard *standard fabrics*

ACRILICO *Irisun*

GSO2 *soft white*

GSO3 *beige*

GSO4 *soft beige*

GSO5 *melage*

GSO6 *beton*

GSO7 *taupe grey*

GSO8 *deep grey*

GSO9 *black*

GS10 *blue*


MISURE STANDARD STANDARD MEASURES

cm	300 x 340	300 x 440	400 x 340	400 x 440	400 x 540	400 x 640	500 x 440	500 x 540	500 x 640
A	300	300	400	400	400	400	500	500	500
B	340	440	340	440	540	640	440	540	640
La	277	277	377	377	377	377	477	477	477
Lb	135	185	135	185	235	285	185	235	285
Pa	12,2	12,2	12,2	12,2	12,2	12,2	12,2	12,2	12,2
Pb	70	70	70	70	70	70	70	70	70
T	32	32	32	32	32	32	32	32	32
Ht	260	260	260	260	260	260	260	260	260
Hc	292	292	292	292	292	292	292	292	292


INFORMAZIONI TECNICHE TECHNICAL INFORMATION

- sezione pilastro 700x122 mm
- sezione trave 700x320 mm
- dimensione massima 500x640 cm
- struttura interna profili in acciaio lavorato con trattamento di zincatura a caldo
- cover esterne in lamiera zincata, tagliata e piegata al laser
- verniciatura a polveri epossidiche a base di resina poliestere, resistente ai raggi UV
- possibilità di personalizzazione della verniciatura (con riferimento alla cartella colori RAL) previa approvazione dell'ufficio tecnico
- tende a bracci estensibili, motorizzate, dotate di telecomando ed anemometro di sicurezza per la chiusura automatica in caso di vento con velocità superiore ai 18 nodi
- tende in tessuto ACRILICO tinto in massa, altezza 120 cm, cucito, disponibile in n°9 colorazioni standard
- led strip dimmerabili, dotate di telecomando, integrate nel controsoffitto del trave
- pillar section 700x122 mm
- beam section 700x320 mm
- maximum size 500x640 cm
- internal framework in steel profiles worked with hot dip galvanizing treatment
- external cover in formed, laser cut, galvanised sheet
- epoxy powder coating resin polyester, UV-resistant
- customized powder coating available in other RAL color on request (prior approval of the technical office)
- electric folding awning arms, motorized, equipped whit remote controller and anemometer for automatic closing of the awning in case of wind stronger than 18 knot
- awning in ACRILIC dyed solution, widht 120 cm, sewn, avialable in n°9 standard colors
- dimmable led strips, equipped with remote controller, integrated in the false ceiling


GATESHADE

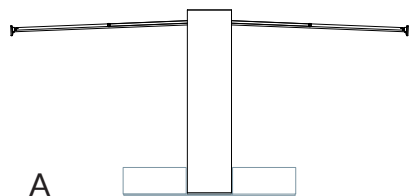


A

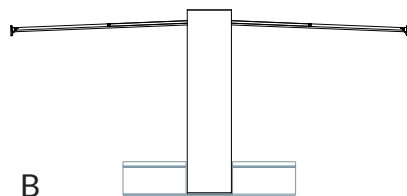


B

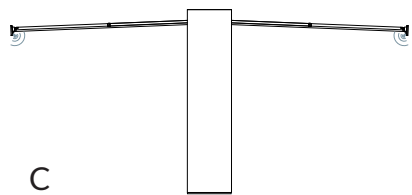

C

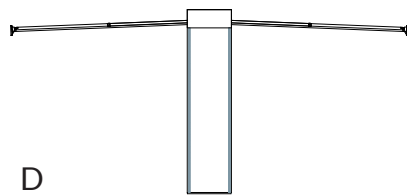

D

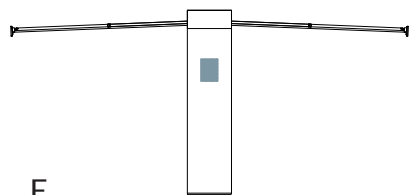

E

ACCESSORI OPTIONALS

A
fissaggio al suolo alternativo con predisposizione di n° 4 fioriere, due per pilastro, per inserimento carico di contrappeso

B
fissaggio al suolo alternativo con predisposizione di n° 4 panche, due per pilastro, dotate di cuscineria, per inserimento carico di contrappeso

C
strisce LED dimmerabili, integrate nei terminali delle tende e dotate di telecomando

D
strisce LED dimmerabili, integrate nella superficie interna delle colonne e dotate di telecomando

E
impianto audio personalizzato completo di diffusori audio, amplificatore e network audio player

A
fixing to the ground with set of n° 4 planters, two for pillar, for insertion of counterweight load

B
fixing to the ground with set of n° 4 benches, two for pillar, completed with pillows, for insertion of counterweight load

C
dimnable LED strips integrated in the end of the awning arms, equipped with remote control

D
dimnable LED strips integrated in internal surface of the pillars, equipped with remote control

E
bespoke sound system composed of speakers, amplifier and network audio player